

Superior equipment *and know-how*

Shaping disks - standard equipment



Shaping disks fill bed centers for a firm bed top with less HP. Furrow shanks aggressively dig furrows and fill bed shoulders. Soil flow is balanced and bed shapers pull straight, resulting in well-formed furrows and accurate bed row spacing. Bed shapers also pull around contours.

Accurate bed height

With conventional preparation tillage OR primary beds, expect accurate bed height. This sets the stage for consistent depth control for mulch layers and cultivators, making your work most productive.

Rugged, versatile toolbar frame

This welded multi-toolbar backbone offers unmatched strength for a modular, bolt-together assembly. Adjust, add or remove attachments as needed to adapt and customize without starting over.



Mount Row Furrowers under the shaper pan


Tip of the day: Mark rows by clamping locking pliers on trailing edge of shaper pan.



Adjust & customize

Set-up for your row crop system

Bed top width, furrow width - and the resulting bed spacing (or furrow spacing) - are independently adjustable. We accommodate various row systems and tractor wheel spacing on fresh-market and wholesale production farms.

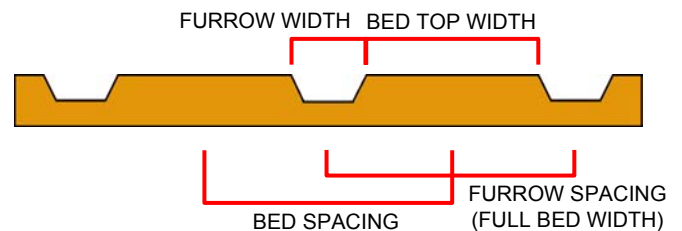

Bed row spacing / furrow spacing

Tractor wheels (*center-to-center of wheels*) typically align with furrows, with the bed top between the wheels. Variations are possible.

Adjust for narrow furrows to maximize bed top or wide furrows for easier walking. Use row markers for wide-space beds for drive-up access with ATVs and trucks.