


MODEL 4612-D



BEDDER-LAYER COMBO

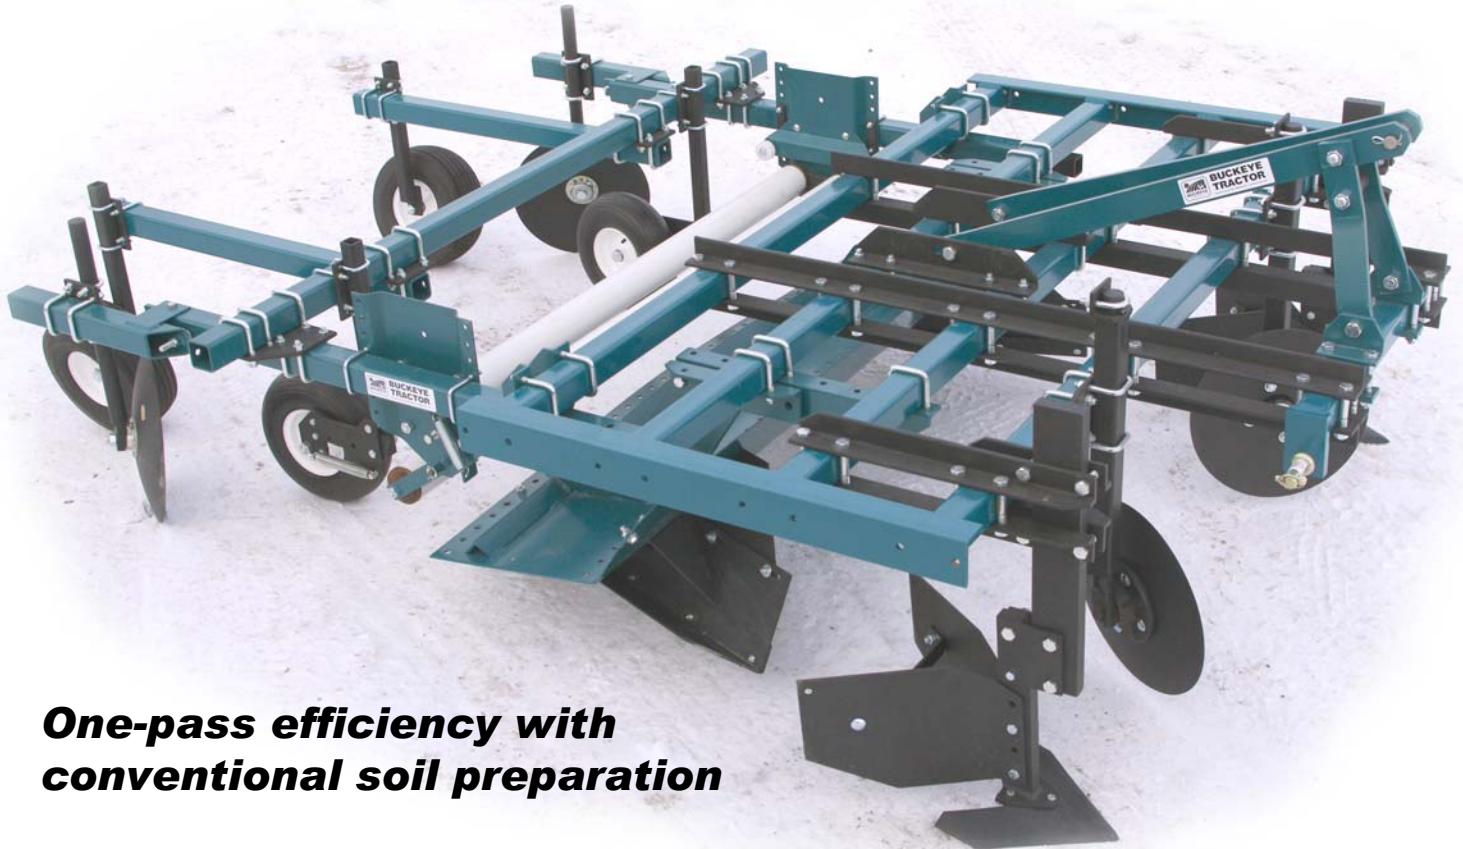

One-pass efficiency with conventional soil preparation

Fully adjustable to match your row system

- 4 to 10-inch bed height
- Adjustable 4 to 5-1/2 ft mulch width
- Adjustable 54 to 72-inch bed row spacing

- 16" shaping disks w/ tapered bearing hubs
- 2-1/2" square toolbars
- 80 PTO-HP rating
- For 50 to 80 HP tractors
- Category-2 hitch - quick-hitch compatible



Furrow shanks and shaping disks are standard to fill bed, pull straight and use less power



Superior floatation with floating tuck wheels and rear gauge wheels



State-of-the-art drip tape application attachments